


FS100

Build No.	kW	HP	Head (m)														
			l/min	0	600	1100	1300	1500	1600	1700	1800	1900	2000	2100	2200	2300	
			m ³ /h	0	36	66	78	90	96	102	108	114	120	126	132	138	
			l/s	0	10	18	22	25	27	28	30	32	33	35	37	38	
FPS-100FS08-2A-506015	15	20	58	50	45	43	41	39	38	36	34	31	29	26	23		
FPS-100FS08-3B-506018	18.5	25	77	67	59	56	53	51	49	46	43	41	37	34	30		
FPS-100FS08-3A-506022	22	30	86	75	67	64	61	59	56	53	50	47	43	39	35		
FPS-100FS08-5C-506030	30	40	134	109	96	91	85	82	79	74	70	65	60	54	47		
FPS-100FS08-6C-508037	37	50	166	135	119	113	107	103	99	94	89	83	76	69	60		
FPS-100FS08-7B-508045	45	60	200	162	144	138	130	126	121	116	109	102	94	85	76		
FPS-100FS08-9C-508055	55	75	251	204	181	173	163	157	151	143	134	125	114	102	88		
FPS-100FS08-12C-508075	75	100	335	272	241	230	217	210	202	192	181	168	155	139	123		
FPS-100FS08-15D-508093	93	125	405	331	289	273	256	246	235	222	208	192	175	157	137		
FPS-100FS08-16C-508110	110	150	446	362	321	307	290	280	269	256	241	224	206	186	163		

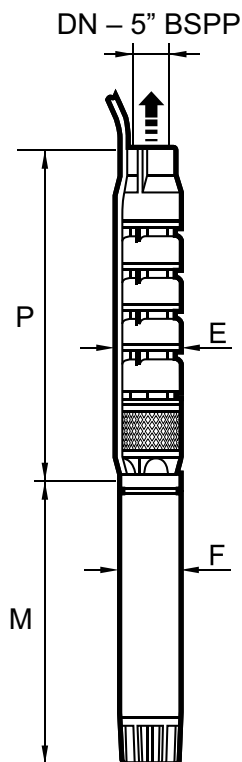

Model	P	M	DN	E _{max}	F	Weight (kg)	Order No.
FPS-100FS08-2A	687	*	5"	200	142	30	96508100605
FPS-100FS08-3B	823	*	5"	200	142	38	96508100610
FPS-100FS08-3A	823	*	5"	200	142	38	96508100615
FPS-100FS08-5C	1095	*	5"	200	142	54	96508100620
FPS-100FS08-6C	1231	*	5"	200	190	63	96508100625
FPS-100FS08-7B	1367	*	5"	200	190	71	96508100630
FPS-100FS08-9C	1639	*	5"	200	190	86	96508100635
FPS-100FS08-12C	2047	*	5"	200	190	110	96508100640
FPS-100FS08-15D	2455	*	5"	200	190	133	96508100645
FPS-100FS08-16C	2591	*	5"	200	190	140	96508100655

Notes:

1. Dimensions in millimetres
2. Refer to Franklin motor brochure for data
3. DN = 5" BSPP