





| TYPICAL AVERAGE PUMP PERFORMANCE | | |
|----------------------------------|--------------|---------------|
| TESTED ON WATER AT 20°C | | |
| COLUMN 80 mm | SHAFTS 22 mm | UP TO 18.5 kW |
| MIN. STARTING TORQUE 27 Nm | | |

GW2502

AQUA C

DISCHARGE HEAD

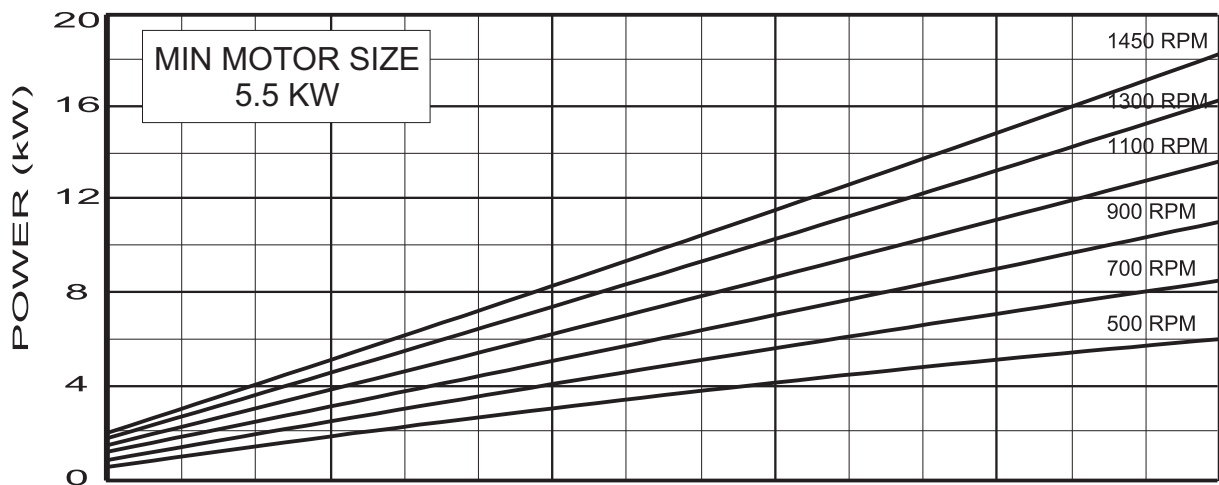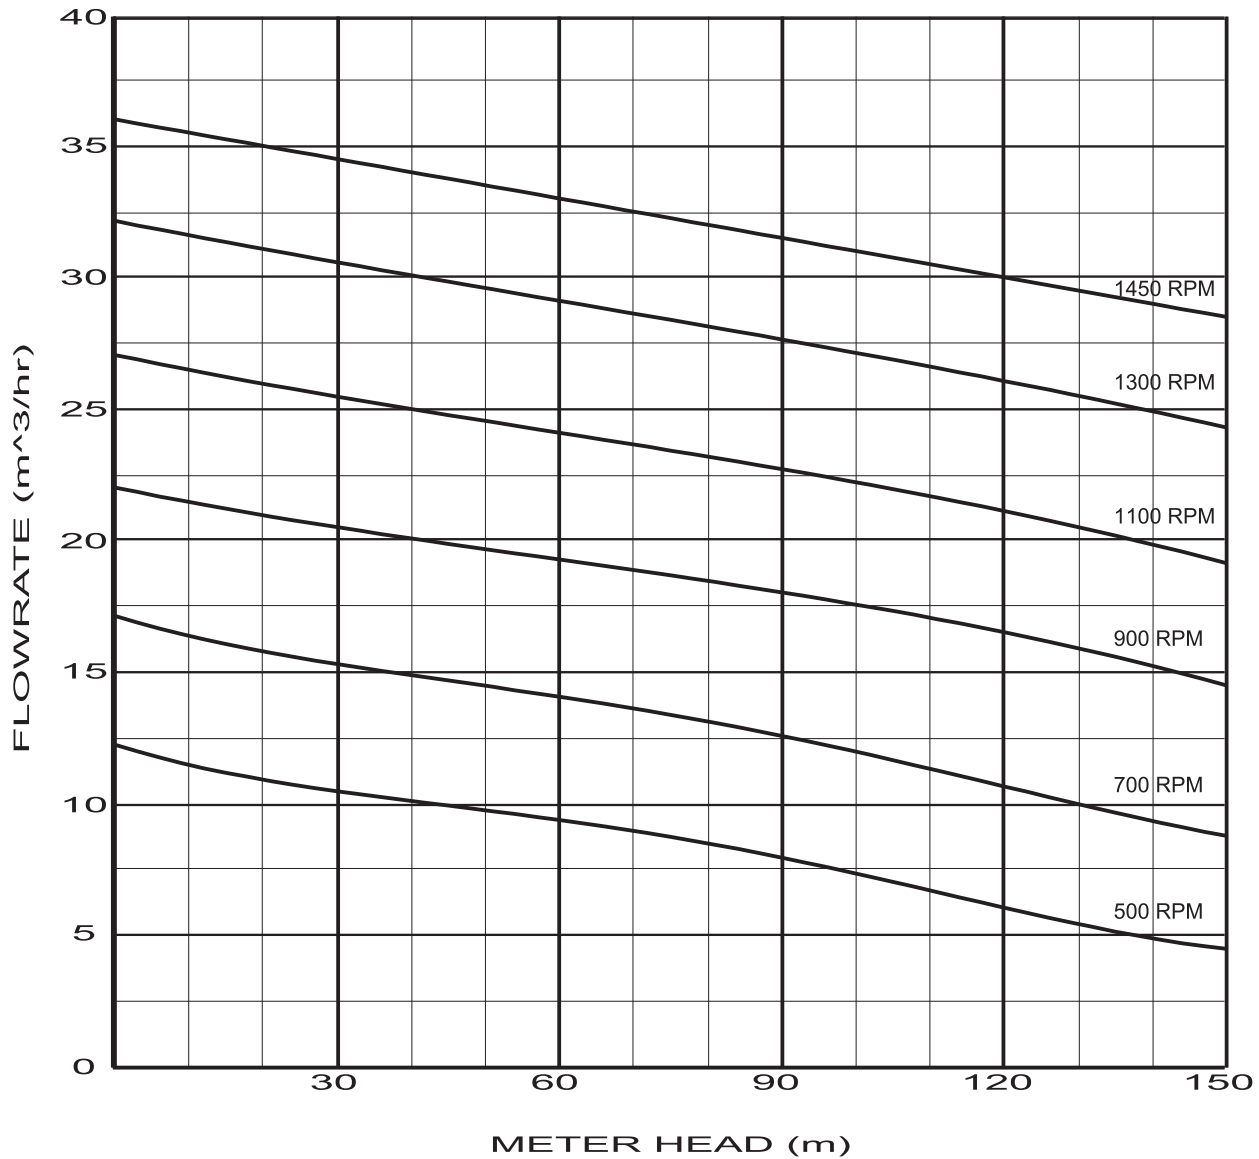

DATE: 01/06/06

CURVE NO. C705

MANUFACTURED BY Franklin Electric