



TYPICAL AVERAGE PUMP PERFORMANCE

GW2504

TESTED ON WATER AT 20°C

COLUMN **80 mm**

SHAFTS **22 mm**

UP TO **30 kW**



ABOVE **30 kW**

AQUA C

AQUA C HD

MIN. STARTING TORQUE **52 Nm**

DISCHARGE HEAD

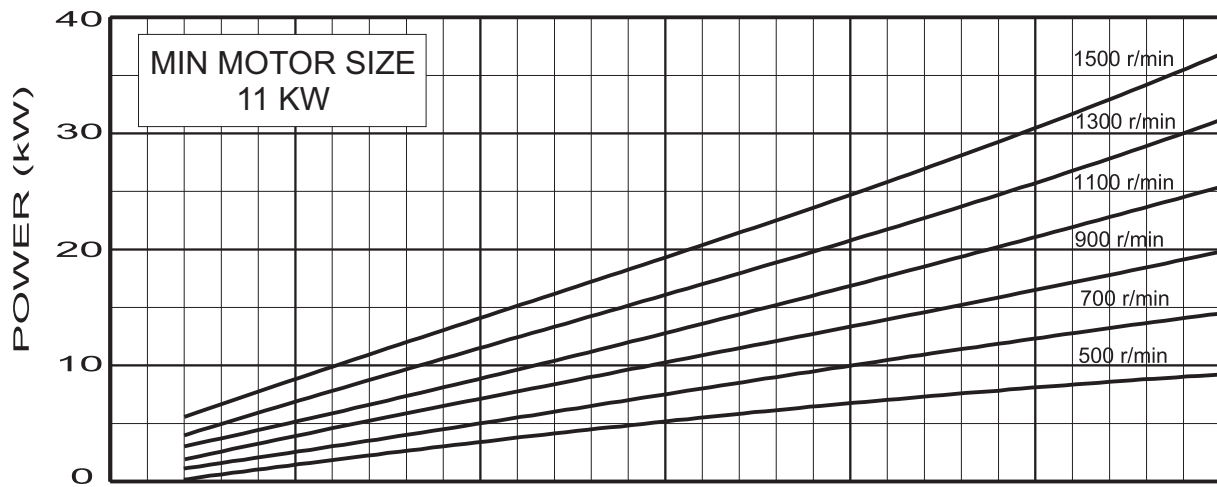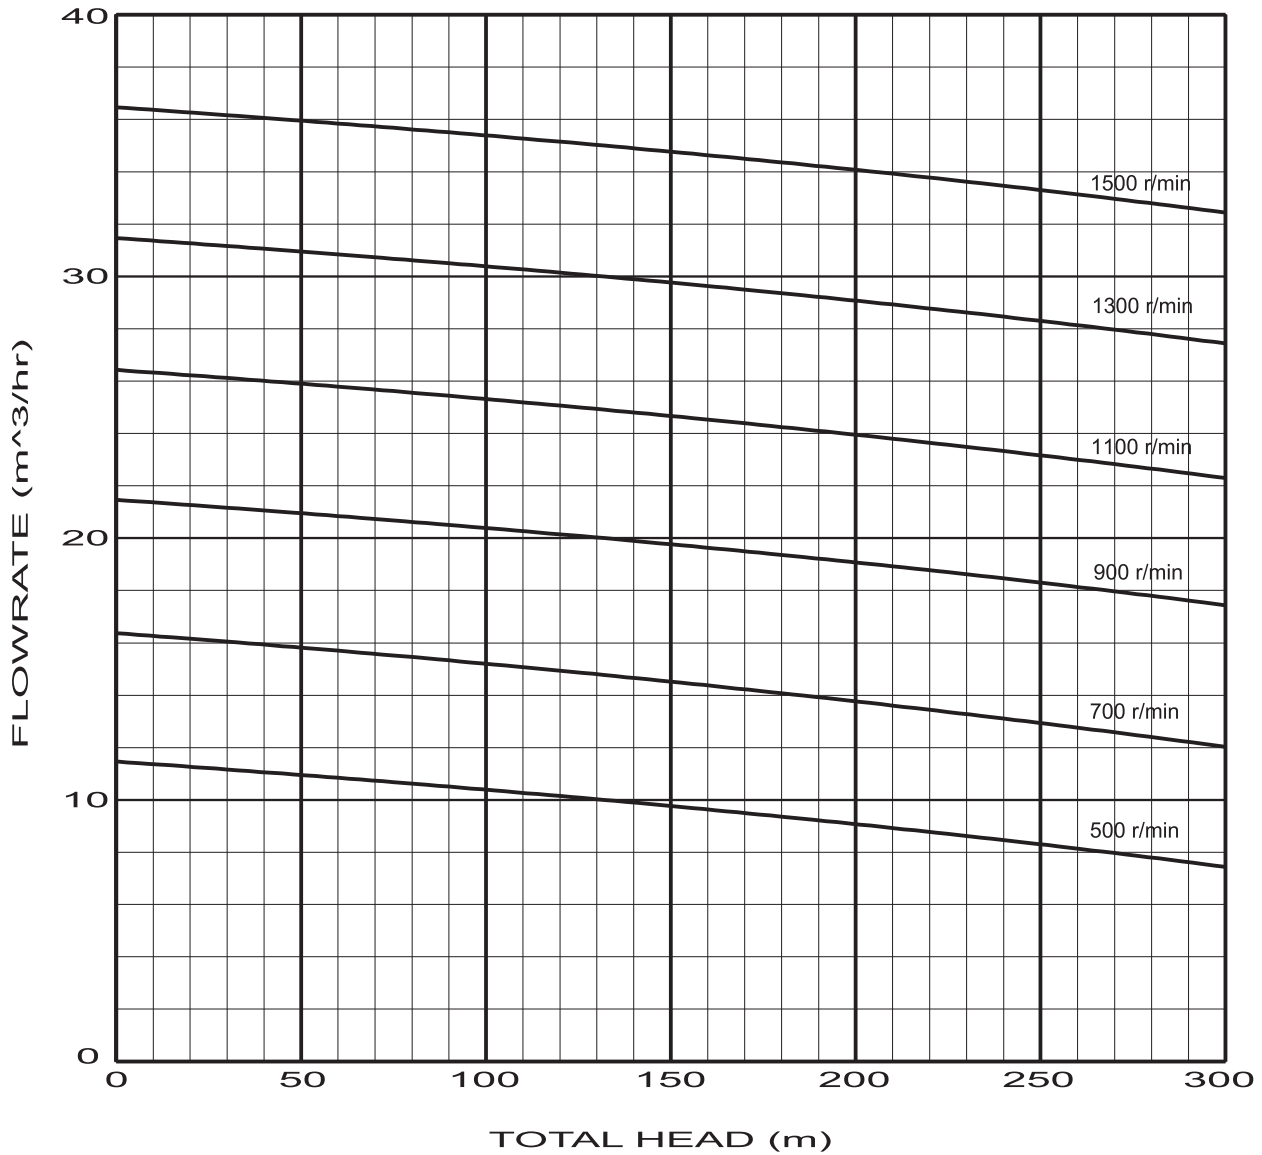

DATE 01/06/06

CURVE NO. C706

MANUFACTURED BY



Franklin Electric