




Franklin Electric

BASIC SELECTION

Model	Port Size	Max Capacity			Max Pressure		Max Speed	Displacement
	Inch	L/Min	I G/M	USGPM	Bar	PSI	RPM	L/100 Revs
R21	1	90	19.8	24.0	12	175	1000	9.0
R22	1/1.5	130	28.6	34.0	10	150	1000	13.0
R23	1.5	180	39.6	47.5	7	100	1000	18.0
R31	1.5	300	66.0	79.0	15	220	1000	29.0
R32	2.0	400	88.0	105.0	10	150	1000	41.0
R33	2.5/3.0	580	128.0	153.0	7	100	1000	57.0
R41	2.5/3.0	760	167.0	200.0	15	220	1000	76.0
R42	3.0	1140	250.0	300.0	10	150	1000	114.0
R43	4.0	1600	350.0	420.0	6	88	1000	160.0

Higher values can be obtained dependent on operating condition. Refer to manufacturer.

ROTORFLO BASIC SELECTION CHART

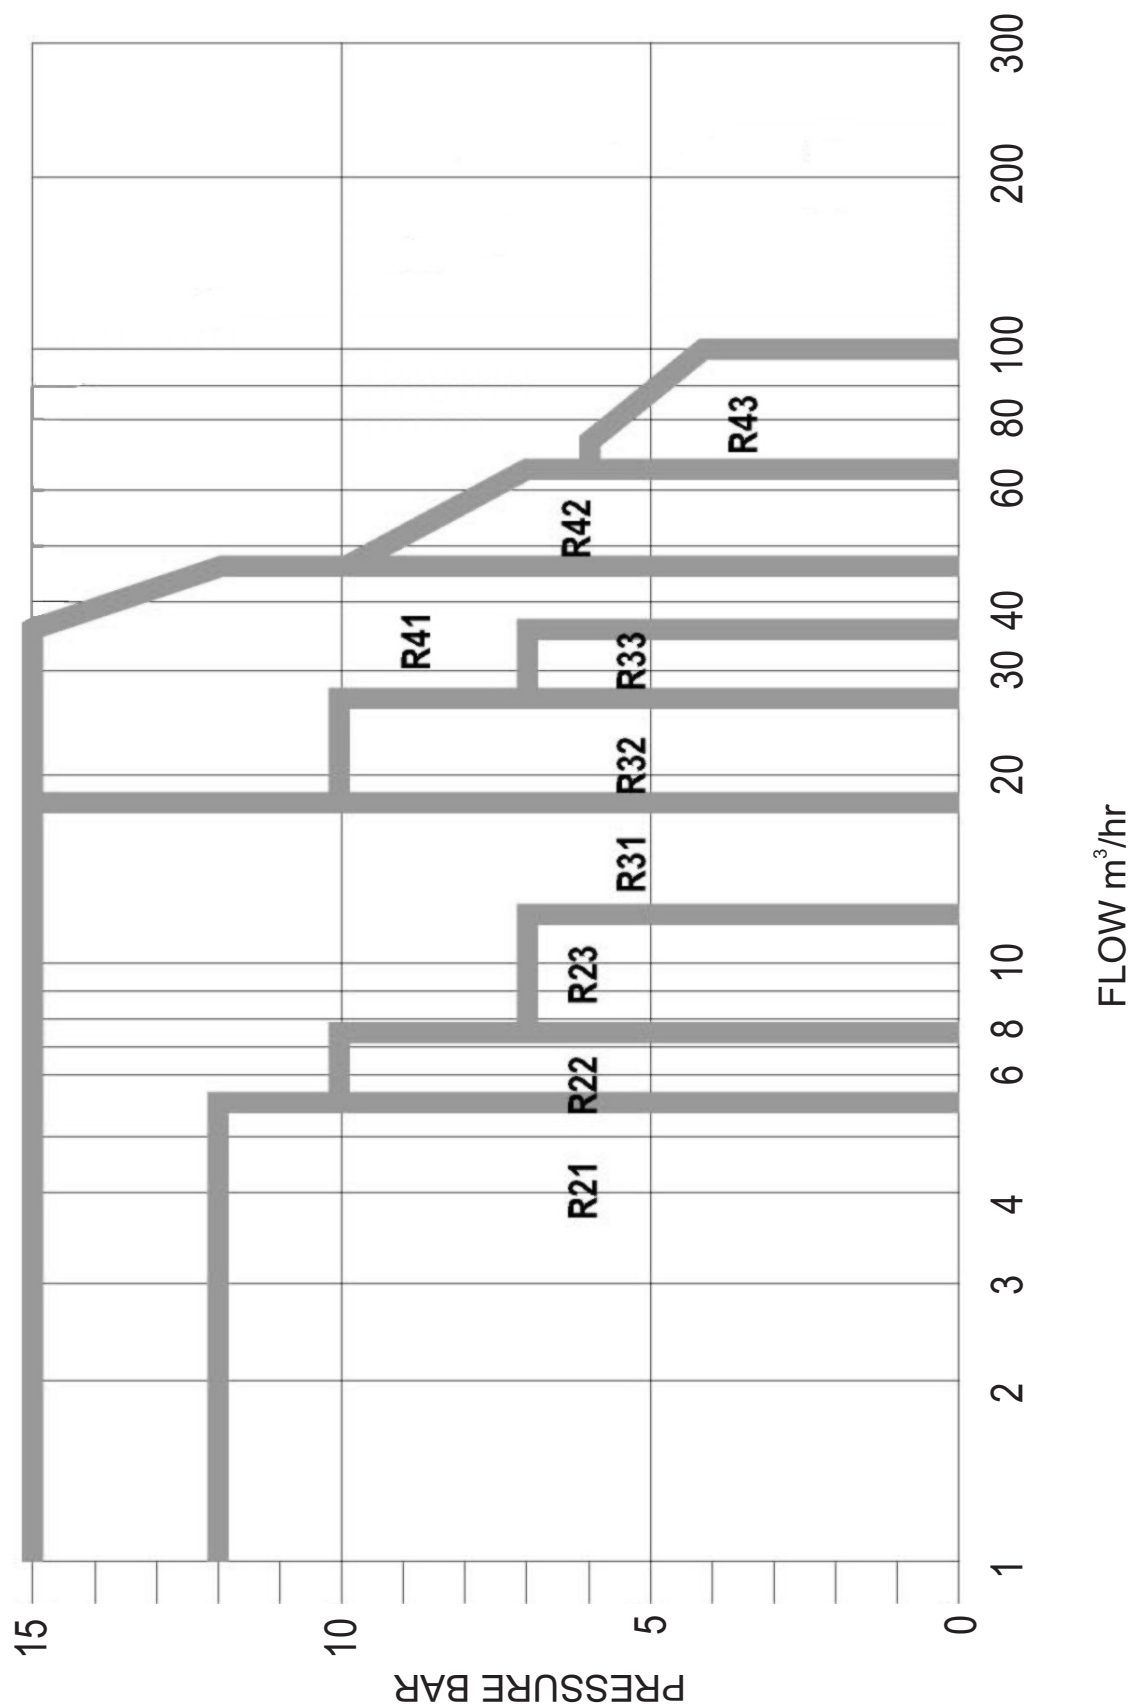

ROTORFLO VISCOSITY LIMITATIONS

