


# FS130

Build No.	kW	HP	Head (m)															
			l/min	0	800	1600	1700	1800	1900	2000	2200	2400	2600	2800	3000	3200		
			m <sup>3</sup> /h	0	48	96	102	108	114	120	132	144	156	168	180	192		
			l/s	0	13	27	28	30	32	33	37	40	43	47	50	53		
FPS-130FS08-2E-506015	15	20	48	41	36	35	34	33	32	30	27	24	20	15				
FPS-130FS08-2A-506018	18.5	25	57	48	42	41	40	39	38	36	33	30	27	22	18			
FPS-130FS08-3E-506022	22	30	72	62	54	53	51	50	48	45	41	35	30	23				
FPS-130FS08-4E-506030	30	40	96	82	72	70	68	66	64	60	54	47	39	31				
FPS-130FS08-4C-508037	37	50	111	94	83	81	80	78	76	72	66	60	53	44	35			
FPS-130FS08-5C-508045	45	60	136	118	104	102	100	97	95	89	82	74	65	55	43			
FPS-130FS08-6A-508055	55	75	168	145	129	126	124	121	118	111	103	93	83	70	56			
FPS-130FS08-8A-508075	75	100	224	194	171	168	165	161	157	148	137	125	110	94	75			
FPS-130FS08-10C-508093	93	125	272	235	207	203	199	194	189	178	164	148	130	109	85			
FPS-130FS08-12A-508110	110	150	335	290	257	252	247	241	235	222	206	187	165	140	112			

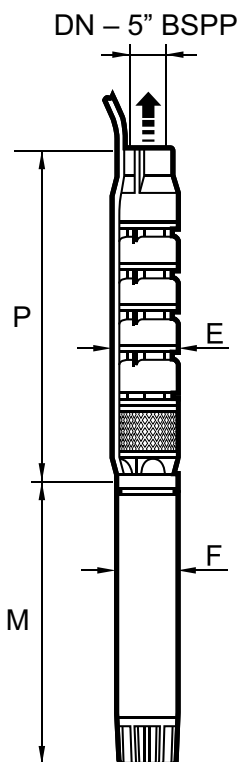

Model	P	M	DN	E max	F	Weight (kg)	Order No.
FPS-130FS08-2E	687	*	5"	200	142	30	96508130605
FPS-130FS08-2A	687	*	5"	200	142	30	96508130610
FPS-130FS08-3E	823	*	5"	200	142	37	96508130615
FPS-130FS08-4E	959	*	5"	200	142	44	96508130620
FPS-130FS08-4C	959	*	5"	200	190	46	96508130625
FPS-130FS08-5C	1095	*	5"	200	190	53	96508130630
FPS-130FS08-6A	1231	*	5"	200	190	61	96508130635
FPS-130FS08-8A	1503	*	5"	200	190	75	96508130640
FPS-130FS08-10C	1775	*	5"	200	190	90	96508130645
FPS-130FS08-12A	2047	*	5"	200	190	105	96508130645

- Notes:**
1. Dimensions in millimetres
  2. Refer to Franklin motor brochure for data
  3. DN = 5" BSPP